


# Quick Dry Varnish

Quick Dry Varnish is the professional's choice for a clear fast dry alkyd varnish. This product is formulated to provide an accelerated dry time with a durable long lasting finish and easy application characteristics.

## Features:

- Accelerated Dry Time
- Durable Long Lasting Finish
- Satin and Semi-Gloss Finishes
- Apply by brush, roller or spray application.

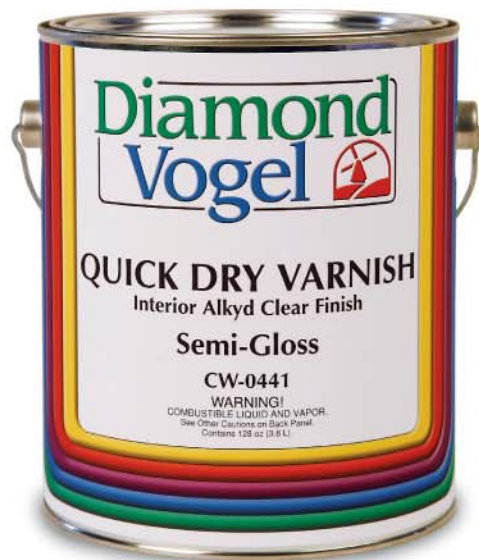

For more information call:

DV Representative  
( ) -

Diamond Vogel  
1-800-72VOGEL  
[www.diamondvogel.com](http://www.diamondvogel.com)

Formulated for use on new and previously finished interior wood surface in both residential and commercial buildings. Quick Dry Varnish is ideal for use on doors, trim and cabinets.

Quick Dry Varnish

# Surface Preparation

# Physical Properties

All surfaces must be cured, clean sound, dry and free of all dirt, dust, efflorescence, wax, oil grease, chalk and any other contamination that would interfere with the new coating adhesion. **Bare surfaces must be properly prepared prior to application of this product.**

### Previously Painted Surfaces

Power or hand washing is recommended to remove contamination. If oil or grease is present, the use of a cleaner/degreaser is required. All cleaning residue must be completely rinsed from the surface. Allow to dry.

Remove all loose coatings and corrosion by scraping, sanding or other abrading method. Dull glossy, slick and/or non-porous surfaces with sandpaper. Patch and fill areas as needed. Spot prime bare areas with appropriate primer.

### Mildew

Remove by using a solution of one (1) part household bleach and three (3) parts water. Apply to mildewed area and scrub. Allow solution to remain on the surface for 3 to 5 minutes then rinse completely and allow to dry before coating application.

### **PHYSICAL PROPERTIES**(CW-0441)

Resin Type	Modified Alkyd
Clean-up Solvent	Mineral Spirits
Solids by Weight	36 %
Solids by Volume	27 %
Recommended Dry Film Thickness per Coat	1 – 1.5 mils
Wet Film to Achieve DFT	3.5 – 5 mils
Theoretical Coverage @ 1 mil	433 ft <sup>2</sup> /gallon
Practical Coverage at Recommended DFT	289 – 433 ft <sup>2</sup> /gallon
<u>Dry Times</u> @ 70° F (21° C) and 50% R.H.	Set to Touch 20 minutes Tack Free 2 hours Recoat 4 hours
VOC's	556 grams/liter

# System Recommendation

### Substrate

Interior Wood

### Primer

Self Sealing  
CW-0403 Super Quick Sanding Sealer

### Finish

CW-Series Quick Dry Varnish

WARNING! If you scrape, sand or remove old paint, you may release lead dust. LEAD IS TOXIC. EXPOSURE TO LEAD DUST CAN CAUSE SERIOUS ILLNESS, SUCH AS BRAIN DAMAGE, ESPECIALLY IN CHILDREN. PREGNANT WOMEN SHOULD ALSO AVOID EXPOSURE. Wear a NIOSH-approved respirator to control lead exposure. Clean up carefully with a HEPA vacuum and a wet mop. Before you start, find out how to protect yourself and your family by contacting the National Lead Information Hotline at 1-800-424-LEAD or log on to [www.epa.gov/lead](http://www.epa.gov/lead).



[www.diamondvogel.com](http://www.diamondvogel.com)  
1-800-72VOGEL (728-6435)

The contents of this literature are for informational purposes only. Consult the product data sheet for complete information.